

## P 产品介绍

Product Introduction

GLTV3



## P 产品特点

Product Features

- ◆ SUS316 SUS304
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆

## A 产品应用

Application






- ◆
- ◆

## S 技术参数



Specification

项目	参数
	100~ 2000mm ( )
	10~ 40mm
	: 0~ 190 240~ 33 ( )
	: 0~ 20mA, 4~ 20mA
	: 0.5~ 4.5VDC、 0~ 5VDC
	10-32v
	125mW
	500mA
	-40~ +85
	IP67
	PVC ( PA )
	AMP
	304 316L
	( )
	304( )
	316 ( )
	BSP11/4 NPT
	38mm*2.6mm O 43mm*3.5mm O

## D 外形尺寸 Dimensions

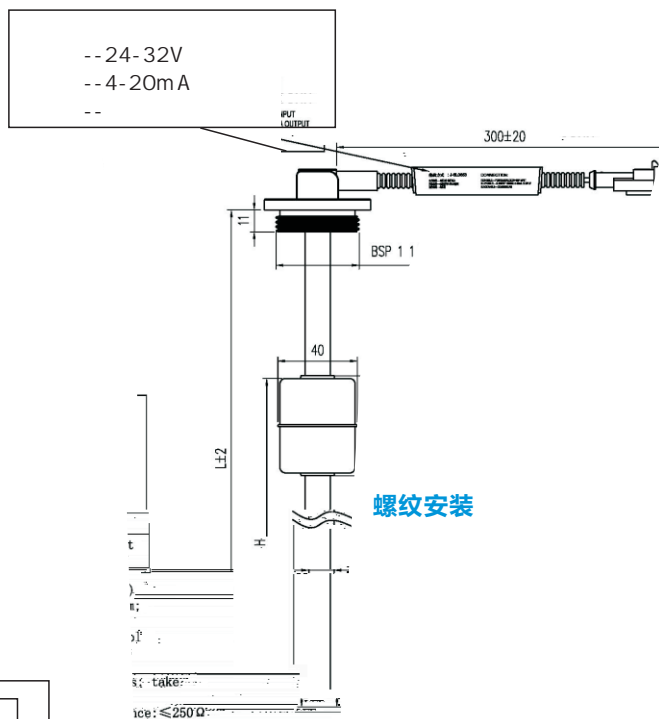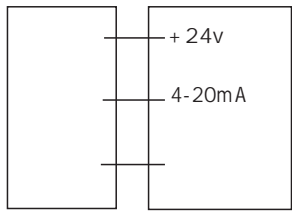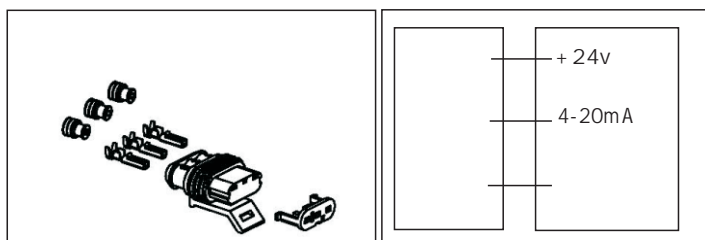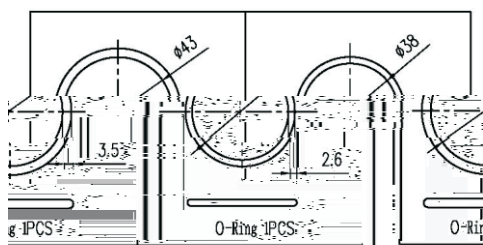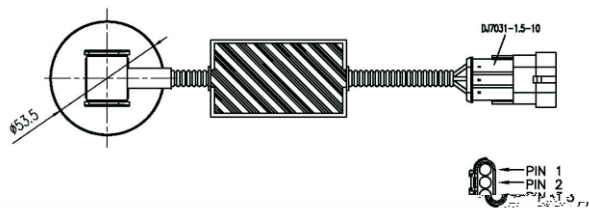

螺纹安装

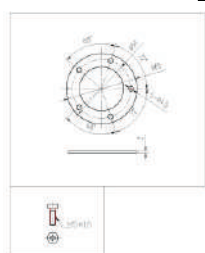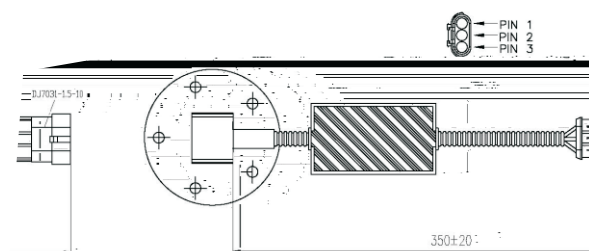

SAE标准5孔

## T 产品选型 Type selection

GLTV3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	选型说明
	N									mm
		X								100-2000mm,
			P1							0~ 190
			P2							240~ 33
			P0P							0~ 20mA
										4~ 20mA
										0.5~ 4.5VDC
										0~ 5VDC