

工作原理 Working Principle



输入

$$D = C \times T / 2$$

C D T

$$L = E - D$$

E L L = E - D

$$E(= \quad), \quad F(=$$


测量范围

- F----
- E----
- B----
- K----


S 技术参数 Specification

	20
	-40~250
	-0.1~2MPa
	± 3mm
	100MHZ-1.8GHZ
	Exia II C T6 Ga
	IP67
	4...20mA/HART()

D 外形尺寸 (mm) Dimensions (mm)

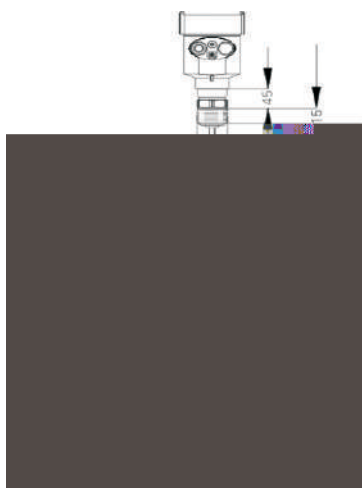

安装图 Installation

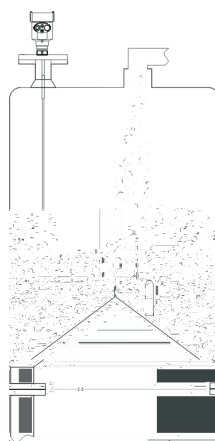

单元	代码	参数
	P	
	I	(Exia II CT6 Ga)
	D	+ (Exd ia II CT6 Gb)
/	A	/4mm
	B	/6mm
	G	G 1½ A
	GA	G 1A
	N	1½ NPT
	NA	1NPT
/	A	DN 50 PN 16C
	B	DN 80 PN 16C
	C	DN 100 PN 16C
	D	DN 150 PN 16C
	E	DN 200 PN 16C
	H	DN 250 PN 16C
	Y	
/	P	/-40~120
	G	/-40~250
	2	(4~20)mA 24V DC/HART
	3	(4~20)mA 24V DC/HART
	4	(4~20)mA (85~265)V AC/DC/HART
	5	RS485/Modbus(6-26V)
/	L	/IP67
	G	/IP67
	M	M20*1.5
	N	1/2 NPT
/	A	
	X	
	Y	